
Quick Start Guide



iris

thermocoagulator® &
digital colposcope

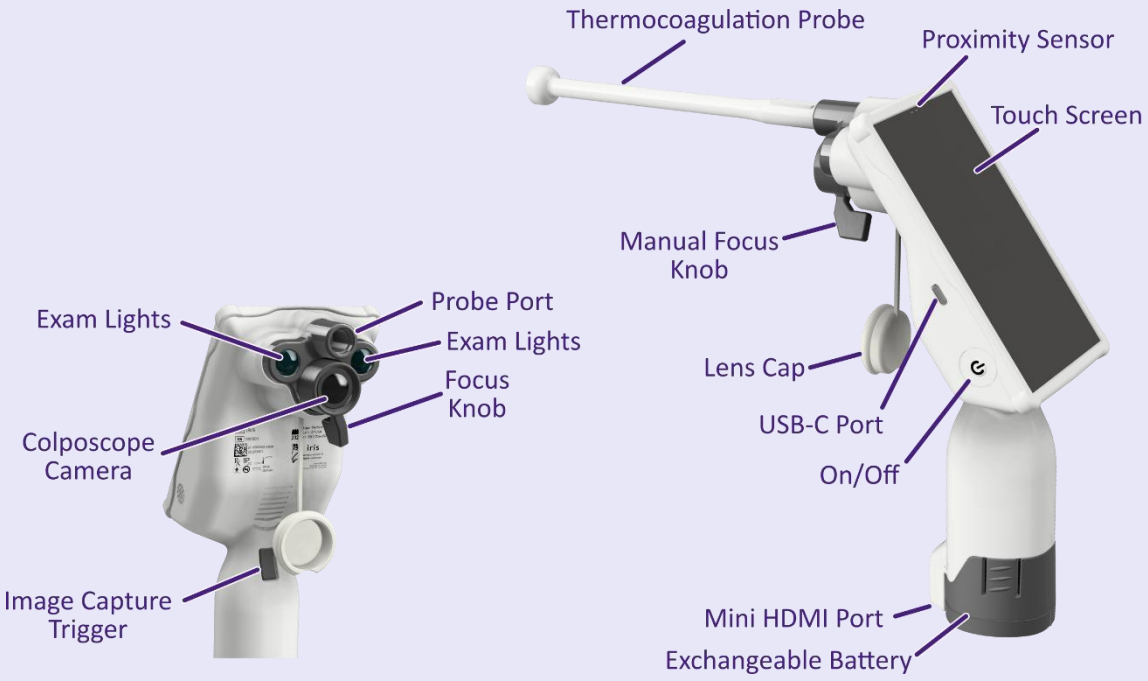


Iris Thermocoagulator and Digital Colposcope

Thank you for purchasing an Iris device, by Liger Medical. This is a quick reference guide to familiarize you with the user interface and basic operation of the Iris device. **Please read the full instructions for use manual carefully before using your device**. This quick reference guide and the full instructions for use manual can be found on the Iris device or online at www.ligermedical.com.

For further support, please contact us:

Liger Medical
3300 North Running Creek Way
Building G, Basement Suite G20
Lehi, UT 84043 USA
Email: support@LigerMedical.com
Tel.: +1 (801) 256-6576
Website: www.ligermedical.com

FIRST TIME SETUP

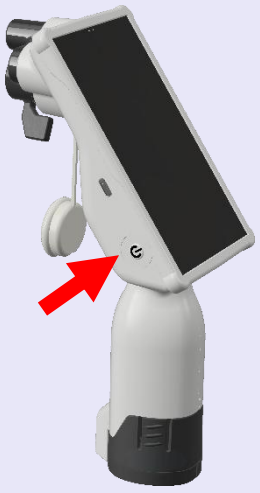


Turning ON the Device

Press the ON/OFF button once to turn on the device. The device will power on and a boot logo will show on the display.


Connect to WI-FI

Tap the menu icon from the login page > Wi-Fi settings, turn on WI-FI and connect to a trusted WI-FI network.



Add a New User


- Click the “Add User” button to create a new account.
- Select account type.
- Enter your first and last name then tap the “Next” button.
- Enter a 6-digit PIN for the user. Re-enter the PIN for confirmation.

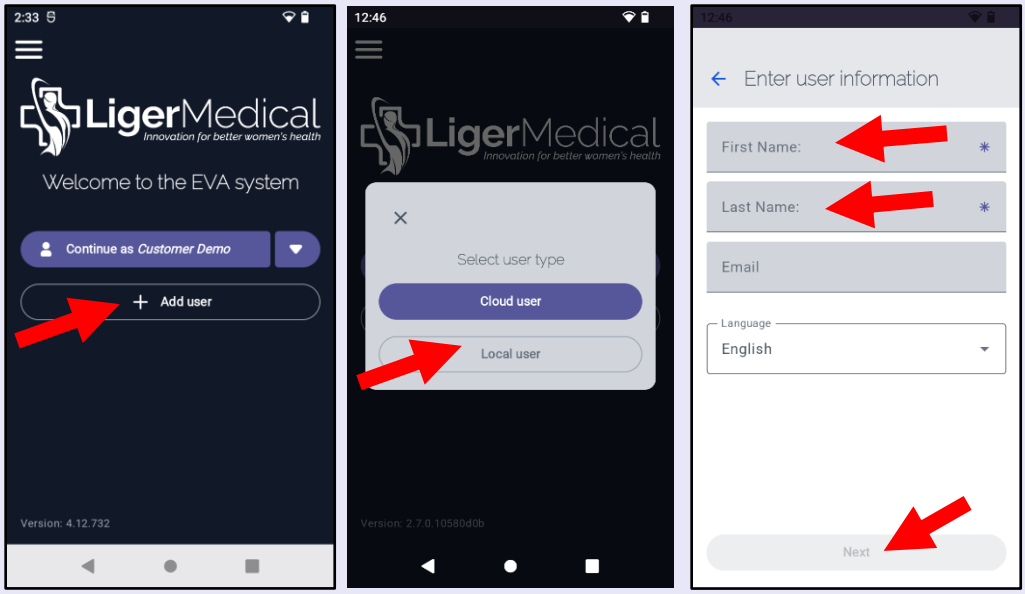

Note: Multiple users may be created on an Iris device.

USER LOGIN


- On the Welcome screen, select the user's name. The last user logged into the device will be displayed.
- To select other users on the device, tap the down arrow, then scroll and tap on the desired user's name.
- Enter the user's PIN.

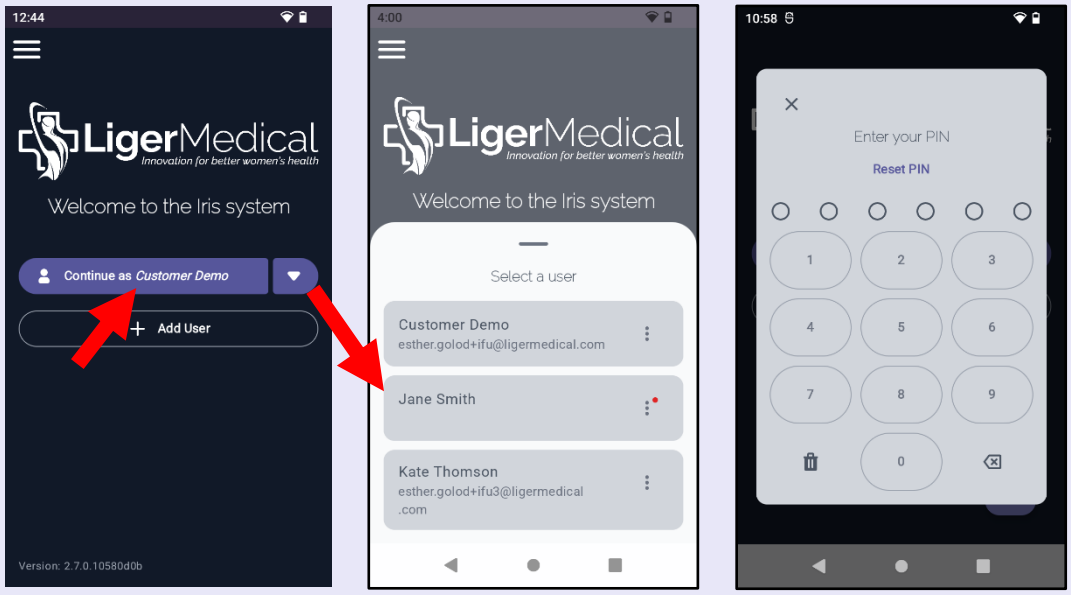

PATIENT DATA


Adding a Patient

A patient can be added after an exam or by tapping on "PATIENT DATA" from the home screen.

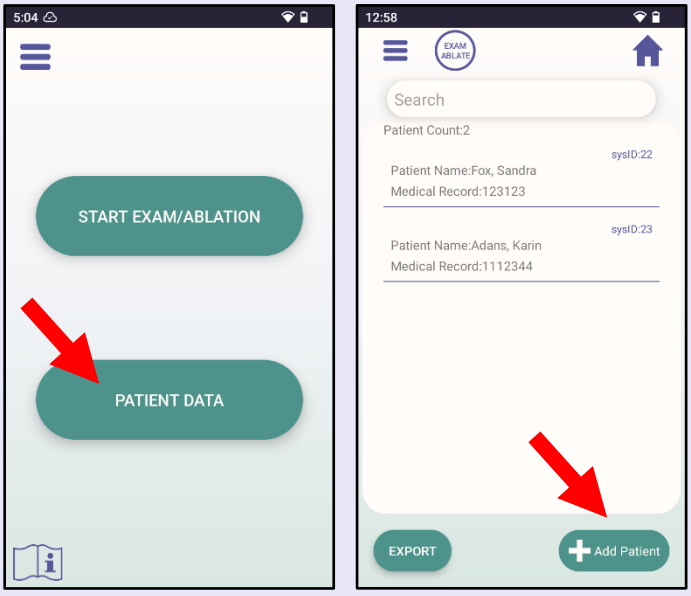

Enter any patient information you desire.


- The only required information is either a first and last name, or a medical record number. Once these conditions are met, you can tap the “DONE” button.

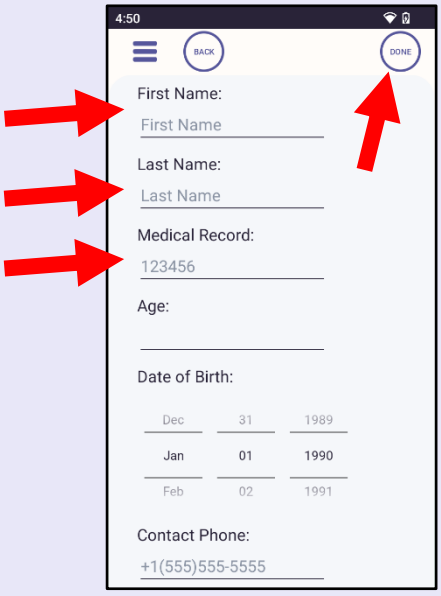

Edit or Delete a Patient

To edit or delete a patient’s information, tap and hold a patient’s name.

A window will appear with options to delete or edit the patient.

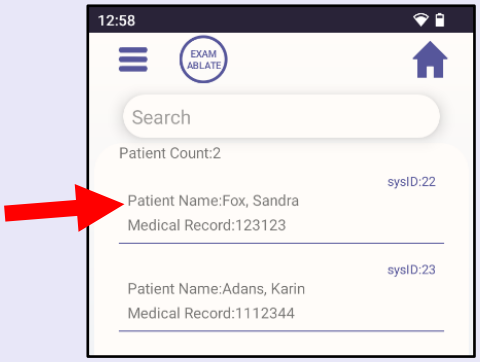



EXAMS

Performing an Exam

From the home page, tap the “START EXAM/ABLATION” button. The camera stream will start, and a live image will be displayed. Note: remember to remove the lens cap.

- Focus the camera by manually turning the focus knob on the front of the device or by moving the device closer or further away from the object.

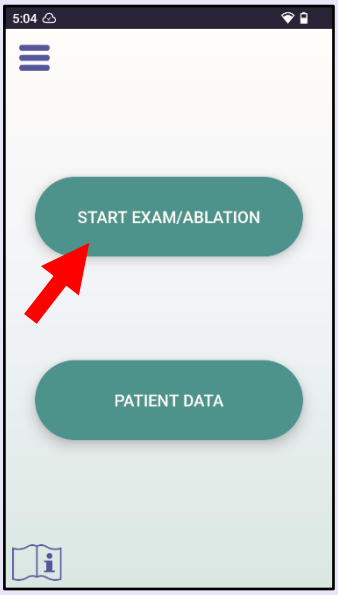


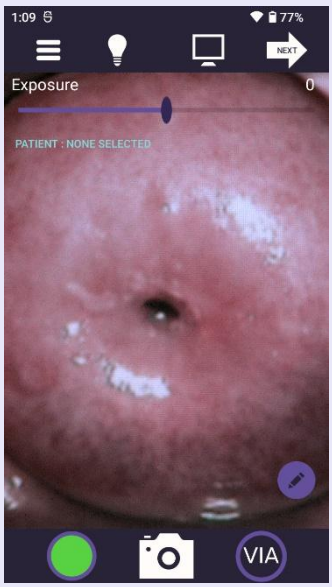

Take a Picture

There are 3 options for taking a picture during an exam:

① Tap the camera icon at the bottom center of the screen.

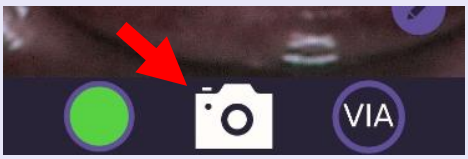

② Press the image capture trigger on the front of the device





③ Place your hand or finger in front of the proximity sensor, located at the top, center of the screen.



Options During an Exam

- Green Filter: Tapping the green button at the bottom, left corner of the screen turns on a green filter to help highlight blood vessels in the tissue.
- VIA Timer: When performing Visual Inspection with Acetic Acid (VIA), tapping the VIA icon will start a 60 second countdown timer, followed by a count-up timer for the visualization time.
- Exam Lights: The exam lights on the front of the device may be turned on or off by tapping the Exam Light Status icon.

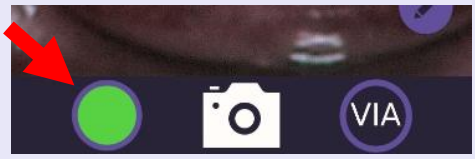

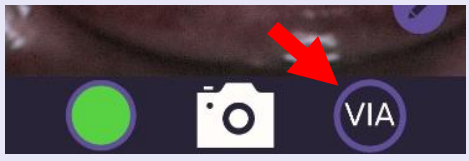



Exam Lights ON




Exam Lights OFF


Saving an Exam

- When the exam is finished, tap the “NEXT” arrow icon.
- An option will be given to select or add a patient record.
  - If the patient already exists on the device, you may select the patient by tapping on their name.
  - If this is a new patient, they can be added by tapping on the “Add Patient” button.



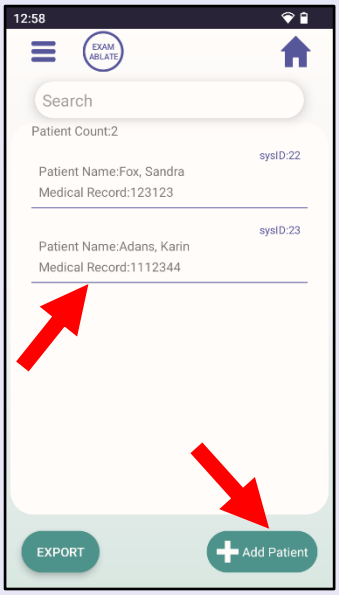


- After selecting or adding a patient, all images taken during the exam will be saved to the patient’s record by tapping the save icon.
  - Clinical impressions and other notes may be recorded and saved to this exam by tapping on the “CLINICAL IMPRESSION” button below the image(s).

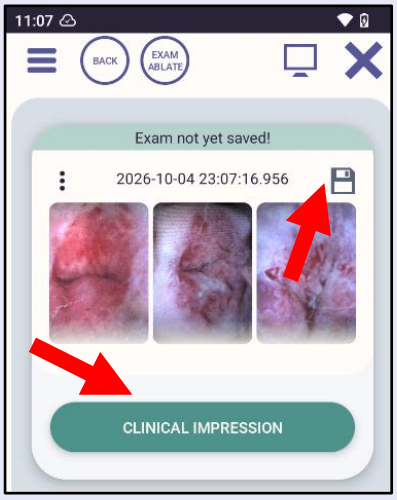



Exporting an Exam

Patient exam records may be exported to an encrypted, PIN protected file. The export can be via e-mail (must be connected to WI-FI) or through the USB-C port on the Iris device.


- From the home screen, tap the “PATIENT DATA” button. Then tap on the “EXPORT” button in the bottom, left corner of the screen.
- Select the patients and exams you would like to export.
- Tap the “EXPORT PATIENTS” button.

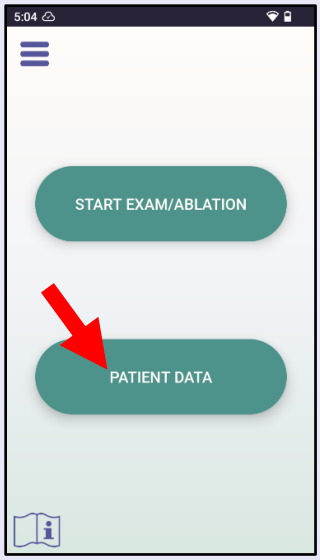


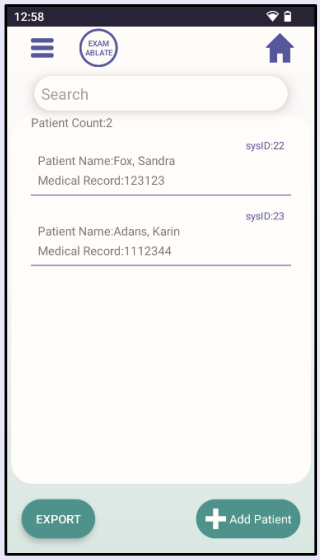

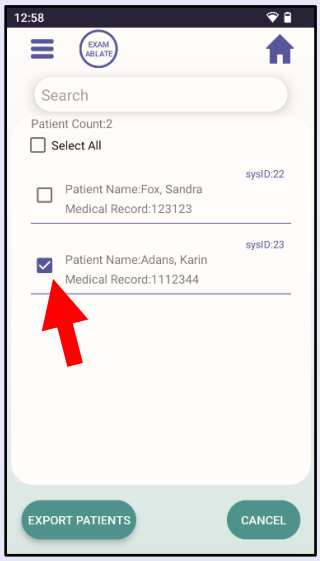


- Enter a Confidentiality PIN. PIN must be 6 digits or longer. This PIN will be required to un-zip the exported file.
- Tap on “Next”.
- After setting the PIN, the user will need to choose whether to export to the user’s email, export to the device’s folder, or export to a connected USB flash drive.

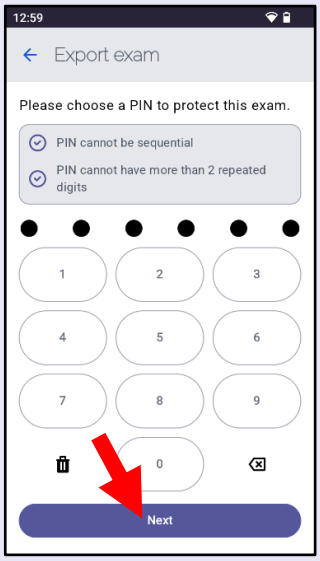


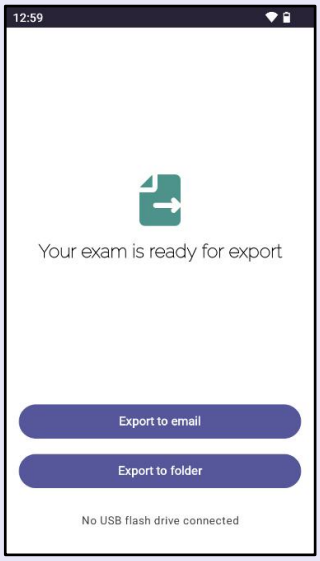

- Upon choosing ”Export to my **email**”, the system will start exporting the examination report as a ZIP file. When the upload process to the portal is completed, the exam will be sent to the user’s email.

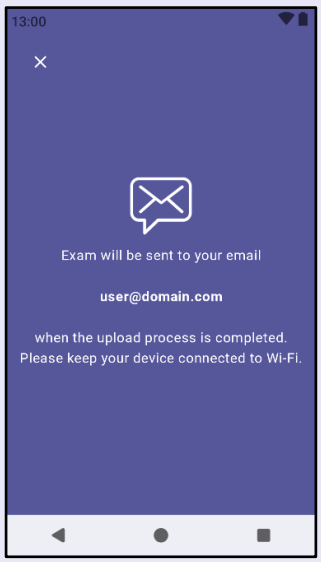

General Process Flow

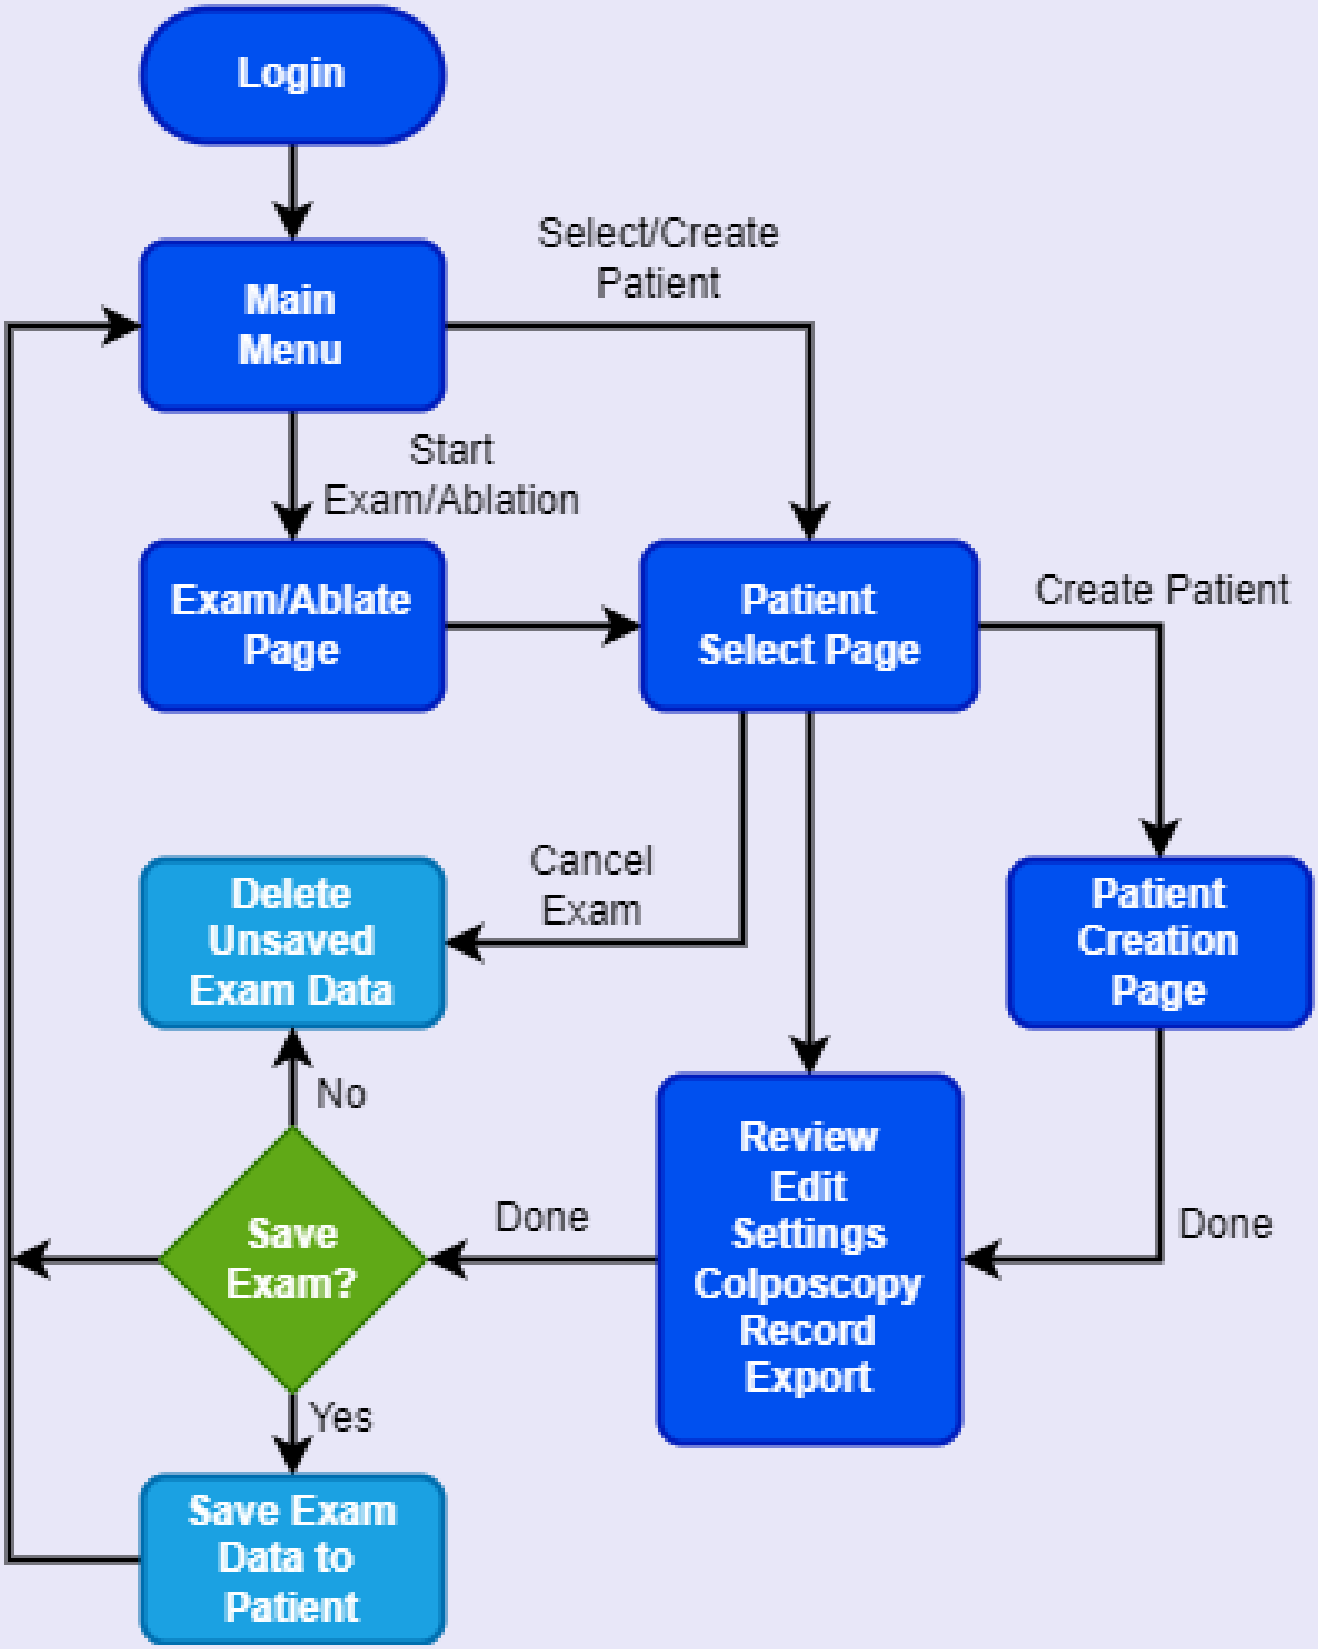

LIGER MEDICAL

Innovation for Better Women's Health

Iris Quick Start Guide
050-0042 Rev. B October 2026